


BOMAG

VIBRATING PLATES NON REVERSIBLE BP 10/36-2, BP 18/45-2

PERFORMANCE DATA

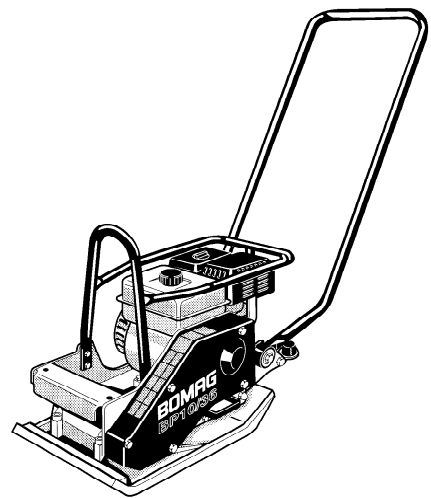


Machine type	Compaction output (m ³ /h) at recommended soil layer thicknesses		
	Gravel, sand	mixed soil	Silt, clay
BP 10/36-2	11-16	11-16	
BP 18/45-2	17-23	14-20	

Machine type	Compaction output (t/h) at different asphalt layer thicknesses		
	2-4 cm	6-8 cm	10-14 cm
BP 10/36-2	4-8	10-13	
BP 18/45-2	5-10	11-15	

BOMAG

Technical Data

Shipping dimensions in m3	without cabin with cabin	
BP 10/36-2	0,119	0,204
BP 18/45-2	0,149	0,255

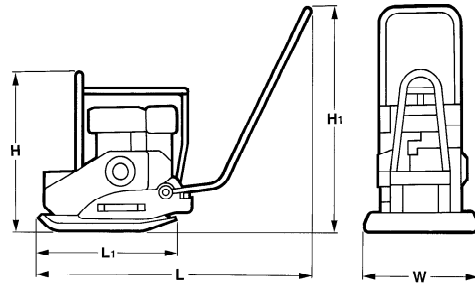

Standard Equipment

- Vibration insulated steering bow, foldable
- Detachable steering handle
- Highly wear resistant base plate with reinforced edges
- Maintenance-free transistor ignition
- Automatic shutdown at low oil level
- Recoil starter
- Reinforced centrifugal clutch
- Engine protection frame
- Single point lifting device
- Lifetime lubricated vibration bearings
- Fully protected V-belt
- Carrying handles

Dimensions in mm

	H	H1	L	L1	W
BP 10/36-2	535	915	1115	558	360
BP 18/45-2	535	915	1115	558	450

Optional Equipment

- Sprinkler system
- Integrated transport frame
- Vulcolan mat
- Tool kit
- Special painting

Technical Data

Weights

Operating weight CECE	kg	83	91
Basic weight	kg	82	90

Dimensions

Working width	mm	360	450
---------------------	----	-----	-----

Driving Characteristics

Working speed, max.	m/min	25	25
Max. gradeability (depending on soil conditions)	%	30	30

Drive

Engine manufacturer	Honda	Honda
Type	GX 120	GX 160
Cooling	air	air
Number of cylinders	1	1
Performance ISO 9249	kW	4
Speed	min-1	3.600
Drive system	mech.	mech.
Fuel	gasoline	gasoline


Exciter system

Frequency	Hz	90	90
Centrifugal force	kN	10	18

Capacities

Fuel	l	2,5	3,6
Water	l	7	7

Technical modifications reserved. Machines may be shown with options.



BOMAG
 Hellerwald
 D-56154 Boppard
 P.O. Box 5162
 Tel. (0)6742 - 1000
 Fax (0)6742 - 3090
 Fax (0)6742 - 3090

BOMAG